

# specification

europa - australia - asia pacific / canada - north america

### Kove Professional


| EU Specifications          | KLST5114 | KLST5121 | KLST5128 | KLST5124 | KLST5139 | KLST5154 | KLST5221 | KLST5228 | KLST5239 | KLST5254 |
|----------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Lamp Configuration (w)     | 1x14 HE  | 1x21 HE  | 1x28 HE  | 1x24 HO  | 1x39 HO  | 1x54 HO  | 2x21 HE  | 2x28 HE  | 2x39 HO  | 2x54 HO  |
| Total Module Length (mm)   | 587      | 887      | 1187     | 587      | 887      | 1187     | 1774     | 2374     | 1774     | 2374     |
| Minimum Curve Radius (mm)  | 680      | 1030     | 1400     | 680      | 1030     | 1400     | 2100     | 2825     | 2100     | 2825     |
| Module Lumen Output (lm)** | 1200     | 1900     | 2600     | 1750     | 3100     | 4450     | 3800     | 5200     | 6200     | 8900     |

\*\* As per Osram's specification at time of printing for 830/840 lamp colors only. Lamps are aged to 100hrs at an ambient temperature of 25°C.

### Kove Professional

| US Specifications          | KLST5114 | KLST5121 | KLST5128 | KLST5124 | KLST5139 | KLST5154 | KLST5221 | KLST5228 | KLST5239 | KLST5254 |
|----------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Lamp Configuration (w)     | 1x14 HE  | 1x21 HE  | 1x28 HE  | 1x24 HO  | 1x39 HO  | 1x54 HO  | 2x21 HE  | 2x28 HE  | 2x39 HO  | 2x54 HO  |
| Total Module Length (mm)   | 23 1/8"  | 34 7/8"  | 46 3/4"  | 23 1/8"  | 34 7/8"  | 46 3/4"  | 69 5/8"  | 93 1/4"  | 69 5/8"  | 93 1/4"  |
| Minimum Curve Radius (mm)  | 26 1/8"  | 40 3/8"  | 54 5/8"  | 26 1/8"  | 40 3/8"  | 54 5/8"  | 82 2/4"  | 111"     | 82 2/4"  | 111"     |
| Module Lumen Output (lm)** | 1200     | 1900     | 2600     | 1750     | 3100     | 4450     | 3800     | 5200     | 6200     | 8900     |


\*\* As per Osram's specification at time of printing for 830/840 lamp colors only. Lamps are aged to 100hrs at an ambient temperature of 25°C.

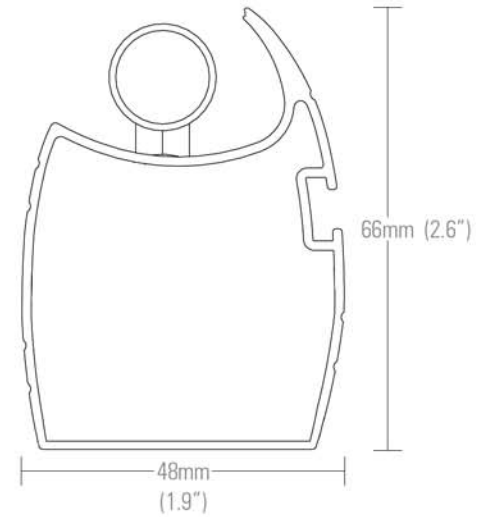

### Control Gear Options\*

- HF - Fixed output      On/Off only
- HFD - Fully dimmable      DALI/DSI/1-10VDC analogue

\*Availability varies between countries. Check with your Intralux distributor.

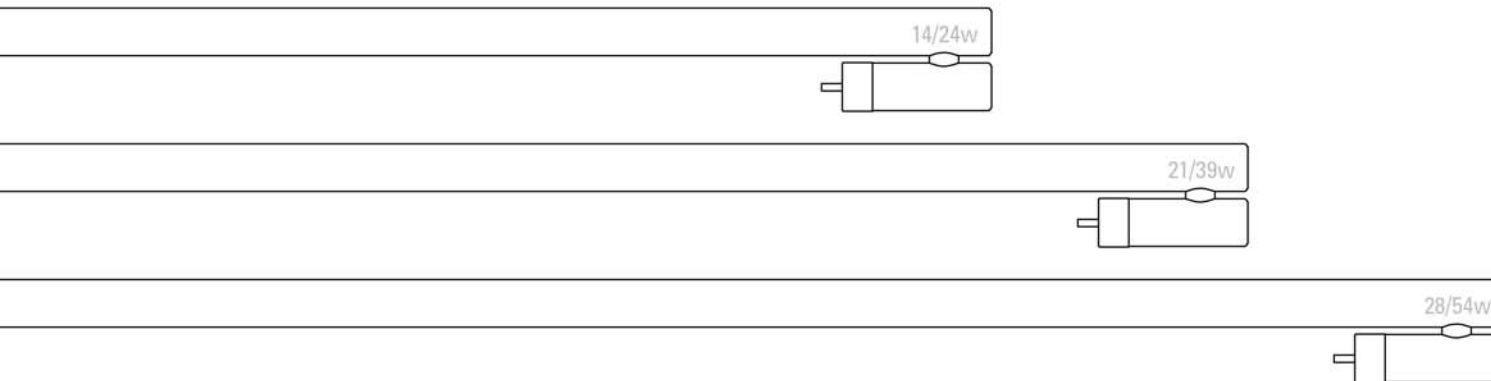

Lamp type: 16mm Osram Seamless Fluorescent T5  
 Lamp Colors: 2700k\*, 3000k, 4000k, 6500k  
 HE Lamps: 14w/21w/28w, HO Lamps: 24w/39w/54w  
 \* will only be available on large project basis

Input Voltage: 100-240v~ 50/60Hz  
 Max System Amps: 10A

